

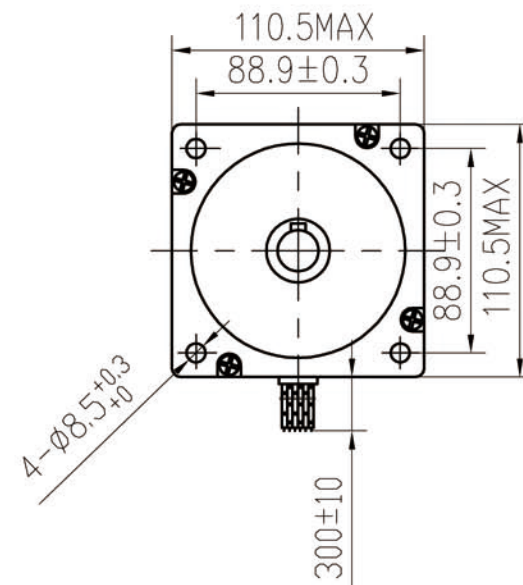


Technical drawing of a circular part with a rectangular feature. The part has a diameter of 6*6*35. A rectangular feature is centered on the top surface, with a width of 2.8 and a height of 2.8. The drawing is labeled P-P 2:1.

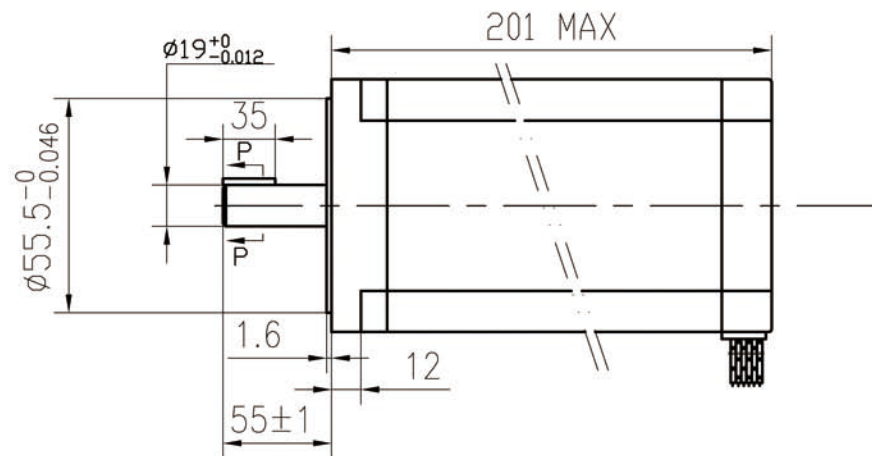

PHASE	相数	2 PHASE	COMMENT
STEP ANGLE	步距角	1.8± 5% ° /STEP	
VOLTAGE	静电压	8V	
CURRENT	电流	8 A/PHASE	
RESISTANCE	电阻	1± 10% Ω/PHASE	
INDUCTANCE	电感	16± 20% mH/PHASE	
HOLDING TORQUE	静转矩	30 N.m Min	
DETENT TORQUE	定位转矩	9.5N.cm Max	
INSULATION CLASS	绝缘等级	B	
LEAD STYLE	引出线规格	AWG16 UL1015	
ROTOR TORQUE	转动惯量	16200 g.cm ²	



					110BYGH201-001	WANTAI MOTOR		
更改 标记		更改单号	签 名	日期		等级标记	重 量	比 例
设 计		ANDY	2011.10.7					
审 核								
工 艺					技术规格书	1	共 张	
						www.wantmotor.com		
标准 化								
批 准								